



PIPE BENDING SYSTEMS | simply smart.




TUBOBEND 60

SEMI-AUTOMATIC
PIPE BENDING MACHINE



BASIC EQUIPMENT / FEATURES

- Free-standing bending head for maximum bending freedom
- Electronic bending axis control via SIMATIC touch panel, with setpoint/actual value display, automatic angle changeover and memory for 100 bending programs
- Hydraulic pipe clamping, adjustable clamping pressure
- Pressure die adjustment hydraulic
- Pressure die device moving (linear guide)
- Hydraulic mandrel extension
- Machine mobile and flexible to use

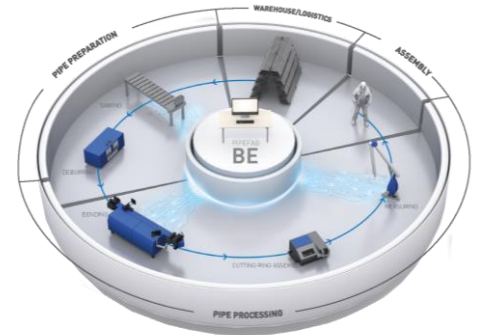

ADDITIONAL EQUIPMENT / ACCESSORIES

- Positioning unit for length and rotation, incl. 3-jaw chuck.
- Mechanical quick-action chuck or hydraulic chuck
- Adjustable bending speed
- Pressure die device moving back
- Pressure die return automatic
- 2-axis measuring system for length and rotation with position display
- Braking system for length and rotation positioning
- Advance solution for mandrel pull-out to optimize sheet quality
- Mandrel lubrication
- Remote control or foot switch for bending axis and clamping
- Mobile control panel
- Interface for data import from PIPEFAB BE pipe bending software
- PIPEFAB BE tube bending software for installation on external PC
- Interface for remote maintenance of the machine via Internet (VPN)

TECHNICAL DATA

Bending capability (steel pipe)	Ø 60,3 x 4,5 mm
Maximum bending radius	200 mm
Maximum bending speed	21°/s
Bending accuracy	± 0,1°
Useable length, approx.	3000/4500/6000 mm
Weight, approx. ¹⁾	1350 kg
Connected load	4,0 kW

¹⁾ At minimum pipe length over mandrel